

## S326R Cleaver

High Precision Optical Fiber Cleaver for Ribbon Fiber




### Features and Benefits

- 200  $\mu$ m and 250  $\mu$ m ribbon fiber compatibility
- Precise fiber alignment mechanism
- Field replaceable blade
- High capacity Anti-static waste bin
- Simple one step operation
- Durable and lightweight design

### Product Description

Specifically designed to handle 200 $\mu$ m and 250 $\mu$ m Rollable Ribbon fiber with ease. With its ergonomic and light weight design, the S326R cleaver offers the operator the versatility to cleave on a work bench or in the palm of their hand. The precise fiber alignment system and re-designed cleaver blade allow for easy fiber loading and improved stability resulting in better single and ribbon fiber cleaves, particularly for Rollable Ribbon. Just pressing the lever completes the fiber cleave and automatically collects the waste in the Anti-static coated waste bin. The S326R blade achieves numerous cleaves with 24 positions and can easily be replaced in the field. The S326R cleaver offers superior optical fiber cleaving for a full range of OSP, OEM, and Data Center applications.

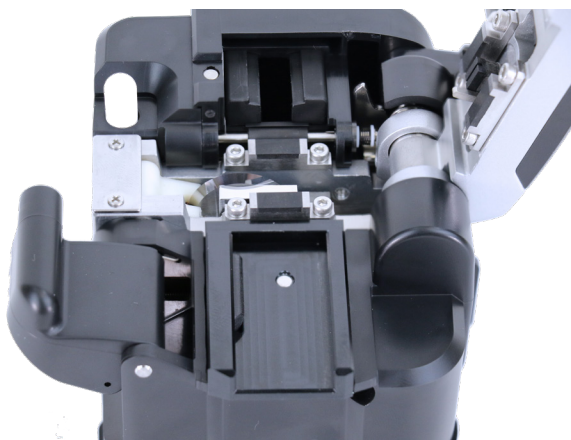

Precise Fiber Alignment System



Wide Lid Angle for Easy Opening

For additional information please contact your sales representative.

You can also visit our website at [www.ofsoptics.com](http://www.ofsoptics.com) or call **1-888-fiberhelp** (1-888-342-3743) USA or **1-770-798-5555** outside the USA.

**Fusion Splicer Customer Service, Training and Service Center**  
Toll Free: 866-452-9516  
Phone: 678-783-1090  
Fax: 678-783-1093  
Email: [splicers@ofsoptics.com](mailto:splicers@ofsoptics.com)

**OFS Corporate Headquarters**  
2000 Northeast Expressway  
Norcross, Georgia 30071, USA  
Toll Free: 888-Fiber-Help  
Intl. Phone: 770-798-5555

## FITEL® S326R Cleaver

### Specifications

<b>Applicable Fibers</b>	All fiber types
<b>Fiber Count</b>	Single to 12 ribbon fiber (Flat and Rollable Ribbon)
<b>Clad Diameter</b>	125 µm
<b>Coating Diameter</b>	Single Fiber: 200 to 900 µm Ribbon Fiber: 200 to 400 µm (thickness)
<b>Cleave Length</b>	Single Fiber: Fixed Length 10 mm Ribbon Fiber: Fixed Length 10 mm
<b>Blade Life *1</b>	48000 fibers (2000 fibers X 24 positions) 4000 ribbon fiber cleaves
<b>Dimensions (WxHxD)</b>	96 x 56 x 79 mm
<b>Weight</b>	260g

### Standard Package

Item	P/N	Quantity
1. S326R Main Body	S326R-01	1
2. Large Anti-Static Capacity Fiber Waste Bin	S326RXS10 10A	1
3. Hard Case	S326X-17	1
4. Hexagonal Wrench	S326X-16	1
Operational Manual	FTS-B423	1



Copyright © 2020 OFS Fitel, LLC.  
All rights reserved, printed in USA.

OFS Marketing Communications  
Doc ID: FITEL-S326R  
Date: 09/20

FITEL is a registered trademark of  
Furukawa Denki Kogyo Kabushiki Kaisha  
DBA Furukawa Electric Co., Ltd.

Furukawa reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any Furukawa warranties or specifications relating to any of its products or services.

